



KBP301G - KBP307G

Single Phase 3.0 AMPS.

Glass Passivated Bridge Rectifiers

KBP

Features


- ✧ UL Recognized File # E-96005
- ✧ Glass passivated junction
- ✧ Ideal for printed circuit board
- ✧ High case dielectric strength
- ✧ Plastic material has Underwriters laboratory flammability Classification 94V-0
- ✧ Typical IR less than 0.1uA
- ✧ High surge current capability
- ✧ High temperature soldering guaranteed:
260°C / 10 seconds at 5 lbs., (2.3 kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✧ Case : Molded plastic body
- ✧ Terminal : Pure tin plated , Lead free. Leads solderable per MIL-STD-202 Method 208
- ✧ Weight : 1.54 grams (0.055 ounce)
- ✧ Mounting position : Any


Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

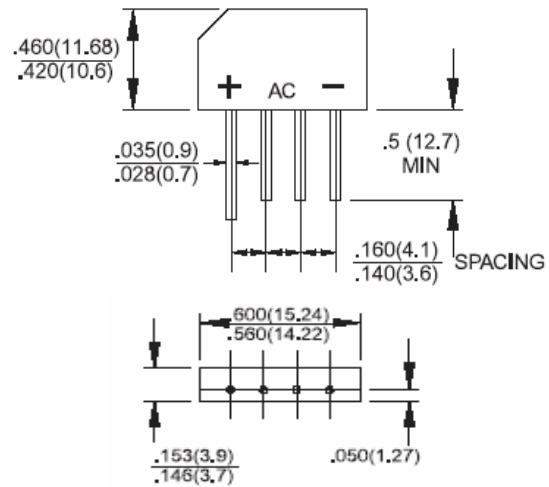

Dimension in inches and (millimeter)

Marking Diagram



- KBP30XG = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Type Number	Symbol	KBP 301G	KBP 302G	KBP 303G	KBP 304G	KBP 305G	KBP 306G	KBP 307G	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_A = 50^\circ\text{C}$	$I_{(AV)}$	3.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	80							A
Rating of fusing ($t < 8.3\text{ms}$)	I^2t	26.5							A ² S
Maximum Instantaneous Forward Voltage @ 2.0A	V_F	1.1							V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	10 500							μA
Typical Junction Capacitance per leg (Note 1)	C_j	215							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$ $R_{\theta JL}$	30 11							$^\circ\text{C/W}$
Operating Temperature Range	T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ\text{C}$

Note 1 : Measured at 1MHz and applied Reverse bias of 4.0V DC.

2. Unit mounted on P.C.B. 0.4" x 0.4" (10mmx10mm) Copper pads, 0.375"(9.5mm) lead length

Rating and Characteristic Curves (KBP301G Thru KBP307G)

FIG 1 Maximum Derating Curve for Output Current

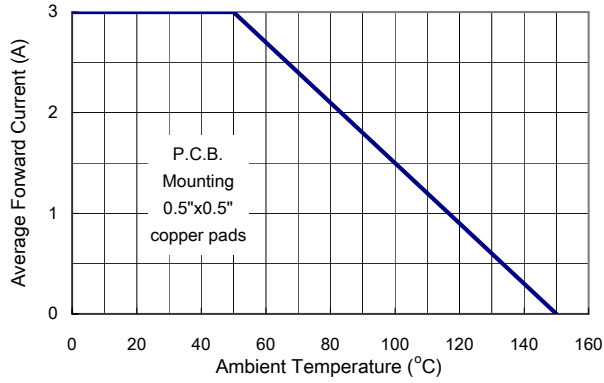


FIG 2 Maximum Forward Surge Current per Leg

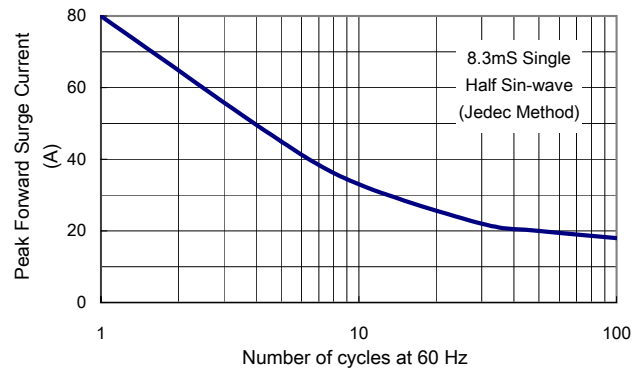


FIG 3 Typical Reverse Characteristics per Leg

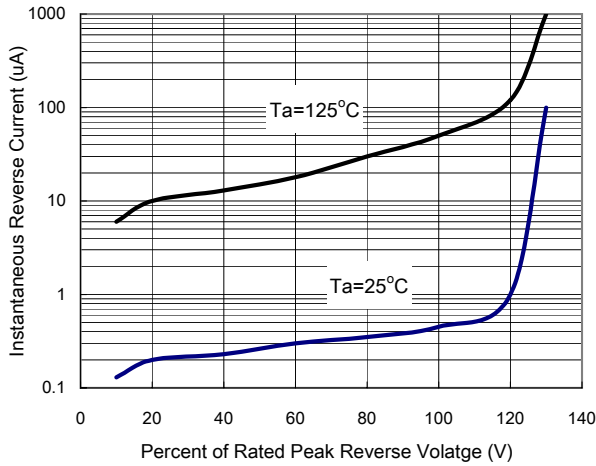


FIG 4 Typical Forward Characteristics per Leg.

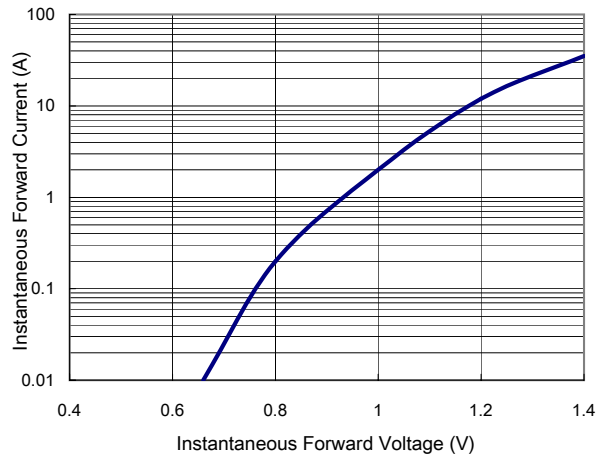


FIG 5 Typical Junction Capacitance

