


● **Description:**

Highly sensitive triggering levels, the PCRX06 Series SCRs is suitable for all applications, where the available gate current is limited, such as capacitive discharge ignitions, motor control in kitchen aids, overvoltage crowbar protection in low power supplies...

● **Features:**

Blocking voltage to 400/600V
On-state RMS current to 0.6A
Non-repetitive peak on-state current to 6A

● **Absolute Maximum Ratings**

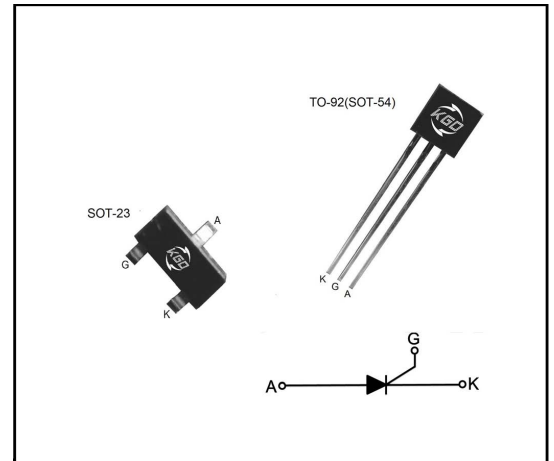

Symbol	Parameter	Conditions	Value	Unit
V_{DRM}	Repetitive peak off-state voltage	$T_J=25^\circ\text{C}$	400/600	V
$I_{T(RMS)}$	RMS on-state current (180° conduction half sine wave)	$T_c=60^\circ\text{C}$	0.6	A
$I_{T(av)}$	Average on-state current (180° conduction half sine wave)	$T_c=60^\circ\text{C}$	0.4	A
I_{TSM}	Non-repetitive surge peak On-state current($T_J=25^\circ\text{C}$)	$t_p=10\text{ms}$	6	A
I^2t	I^2t Value for fusing	$t_p=10\text{ms}$	0.25	A^2S
I_{GM}	Peak gate current	$t_p=20\mu\text{s}, T_J=110^\circ\text{C}$	0.5	A
$P_{G(AV)}$	Average gate power dissipation		0.1	W
T_{STG}	Storage temperature		-40 150	$^\circ\text{C}$
T_J	Junction temperature		-40 110	$^\circ\text{C}$

● Electrical Characteristics



Symbol	Conditions	Value			Unit
		MIN	TYP	MAX	
I_{GT}	$V_D=6V, R_L=100\Omega$	5	30	120	μA
V_{GT}		/	0.6	0.8	V
V_{GD}	$V_D=V_{DRM}, R_L=3.3K\Omega, R_{GK}=1K\Omega, T_J=110^\circ C$	0.1	/	/	V
I_L	$I_G=1.2 I_{GT}$	/	/	6	mA
I_H	$I_T=50mA$	/	/	5	mA
dv/dt	$V_{DM}=67\%V_{DRM}, R_{GK}=1K\Omega, T_J=110^\circ C$	10	/	/	V/ μs

● Electrical Characteristics


Symbol	Parameter	Numerical	Unit
V_{TM}	$I_T=1A, t_p=380\mu s$ $T_J=25^\circ C$	1.7	V
I_{DRM}	$V_D=V_{DRM}, V_R=V_{RRM}$ $T_J=25^\circ C$	5	μA
I_{RRM}	$T_J=125^\circ C$	0.1	mA

● Thermal Characteristics

Symbol	Parameter	Numerical(MAX)	Unit
$R_{th(j-c)}$	Junction to case	TO-92	75
		SOT-23	15
$R_{th(j-a)}$	Junction to ambient	TO-92	200
		SOT-23	400
T_L	Lead Solder Temperature(<1/16" from case, 10 secs max)	260	$^\circ C$

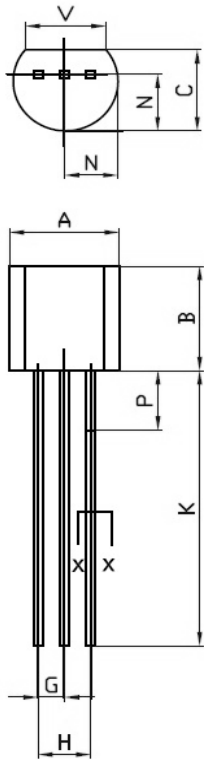
Package Outline Dimensions
TO-92 (SOT-54)


Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.45	5.2	0.175	0.205
B	4.32	5.33	0.170	0.210
C	3.18	4.19	0.125	0.165
D	0.407	0.533	0.016	0.021
G	1.15	1.39	0.045	0.055
H	2.42	2.66	0.095	0.105
J	0.39	0.50	0.015	0.020
K	12.70	-	0.500	-
N	2.04	2.66	0.080	0.105
P	-	2.54	-	0.100
V	3.43	-	0.135	-

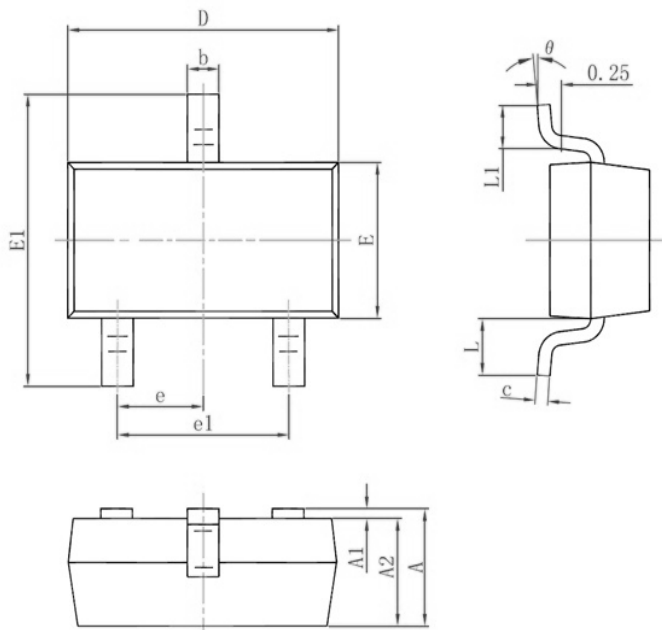
SOT-23


Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950		0.037	
e1	1.800	2.000	0.071	0.079
L	0.550		0.022	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

- **Marking**



TO-92



SOT-23

