


RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free

### FEATURES

- $I_o$  : 10A
- $V_{RRM}$  : 50~1000V
- Glass passivated chip
- High surge forward current capability

### APPLICATIONS

- General purpose 1 phase Bridge rectifier applications

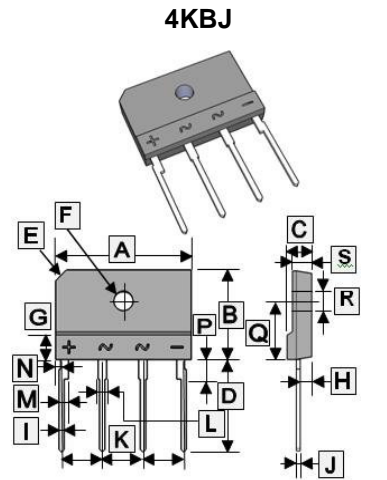

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	24.7	25.3	J	0.6	0.8
B	14.7	15.3	K	7.3	7.7
C	4.4	4.8	L	1.7	2.1
D	17.0	18.0	M	2.0 TYP.	
E	3.0 x 45°		N	1.05	1.45
F	3.1	3.4	P	3.3	3.8
G	4.0		Q	9.5	10.1
H	3.2	3.4	R	3.1	3.4
I	0.9	1.1	S	3.4	3.8

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Part Number								Unit
		KBJ 10005	KBJ 1001	KBJ 1002	KBJ 1004	KBJ 1006	KBJ 1008	KBJ 1010		
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V	
Average Rectified Output Current @ 60Hz sine wave, R-load	With heatsink $T_C=80^\circ\text{C}$	10								A
	Without heatsink $T_A=25^\circ\text{C}$	3.6								
Surge (Nonrepetitive) Forward Current @ 60Hz sine wave, 1 cycle, $T_J=25^\circ\text{C}$	$I_{FSM}$	150								A
Current Squared Time <sup>1</sup>	$I^2t$	93								A <sup>2</sup> S
Dielectric Strength @ Terminals to case , AC 1 minute	$V_{DIS}$	2								KV
Mounting Torque @ Recommend torque : 5kg.cm	Tor	8								Kg.cm
Peak Forward Voltage @ $I_{FM}=5\text{A}$ , Pulse measurement, Rating of per diode	$V_{FM}$	1.1								V
Peak Reverse Current @ $V_{RM}=V_{RRM}$ , Pulse measurement, Rating of per diode	$I_{RRM}$	10								$\mu\text{A}$
Thermal Resistance	Without heatsink	25								$^\circ\text{C} / \text{W}$
	With heatsink	2.3								
Junction and Storage temperature range	$T_J, T_{STG}$	-55~+150								$^\circ\text{C}$

Notes :


1.  $1\text{ms} \leq t < 8.3\text{ms}$   $T_J=25^\circ\text{C}$  , Rating of per diode

**RATINGS AND CHARACTERISTIC CURVES**


**FIG1: I<sub>o</sub>-T<sub>c</sub> Curve**

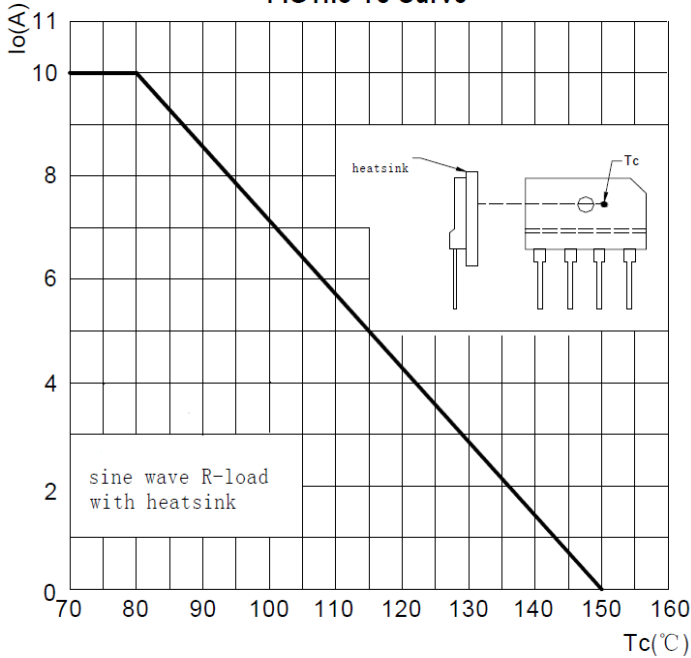

**FIG2: Surge Forward Current Capability**

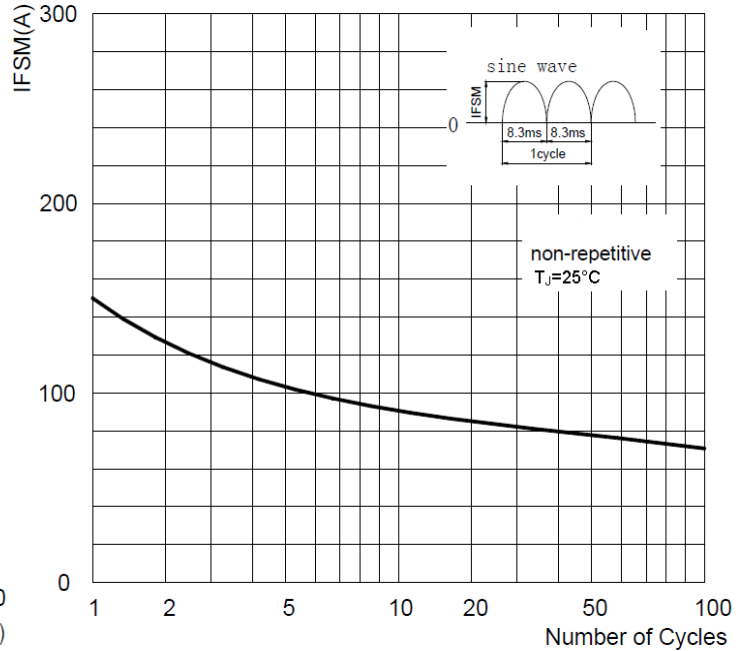

**FIG3: Forward Voltage**

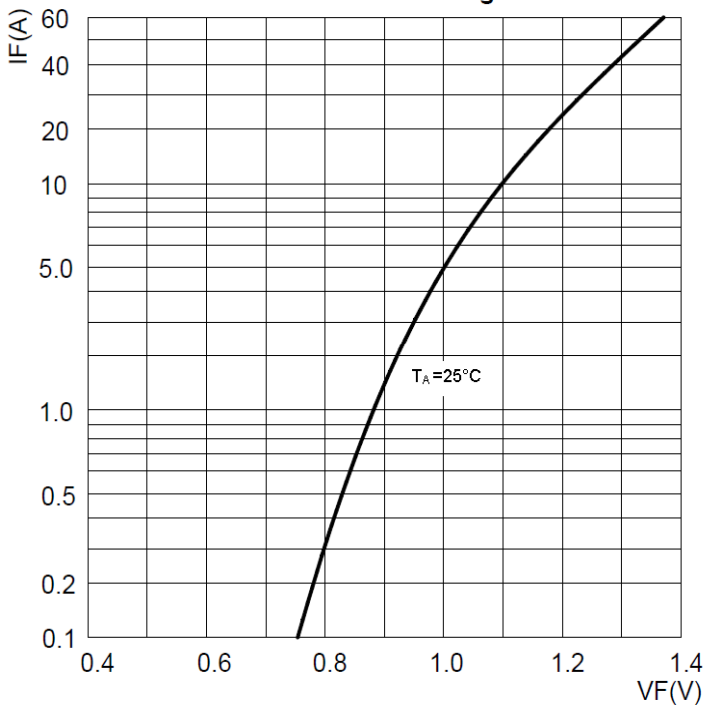

**FIG4: Typical Reverse Characteristics**

